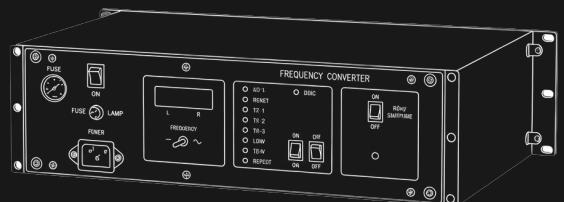
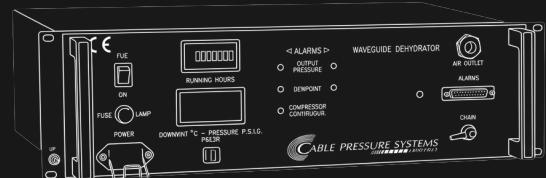


**Rack Mounted Systems**

## 19" Rack Mount Dehydrator Unit 6233

This compact automatic pressurising dehydrator fits into a standard 19" rack and only utilises 133mm of height. The unit is completely self-contained requiring no additional hardware. Output pressure is controlled electronically thus removing the need for external pressure regulators, the customer can specify an output between 0.5 PSI and 15 PSI.

The system is designed to be fully automatic, routine maintenance is minimised by the use of an automatically regenerated molecular sieve. Scheduled maintenance intervals are only required after 2500 hours of compressor run time, with a typical duty cycle of 5% – 10% this unit is capable of running for prolonged periods without intervention. The types 6233 & 6234 only differ in terms of front and rear connections, the 6233 interfaces via the front panel and the 6234 via the rear.

**Specifications:**

- Compact space-saving 19" rack mounting
- Dry air output to better than -40° Celsius
- Low power requirement
- Oil-less air compressor

